



## LEGEND TUBULAR - C 20 UPS / INVERTER BATTERIES




**SAKTHI ACCUMULATORS PVT LTD**  
(An ISO 9001:2015 & ISO 14001:2015 Certified Company)



## FEATURES

- ⚡ Long life (4 - 6 years)
- ⚡ Higher power to volume ratio
- ⚡ Very Low-Maintenance - Topping up once in 4-5 months
- ⚡ Micro-porous ceramic vent plugs - free from Acid-fumes
- ⚡ Tubular Positive Plates
- ⚡ Battery confirms to IS: 13369
- ⚡ Designed for regular deep discharge cycles
- ⚡ Rugged PPCP Container
- ⚡ Higher Ampere-Hour efficiency >90%
- ⚡ Higher Watt-Hour efficiency >75%
- ⚡ Heavy duty Lug type terminals - Easy connection

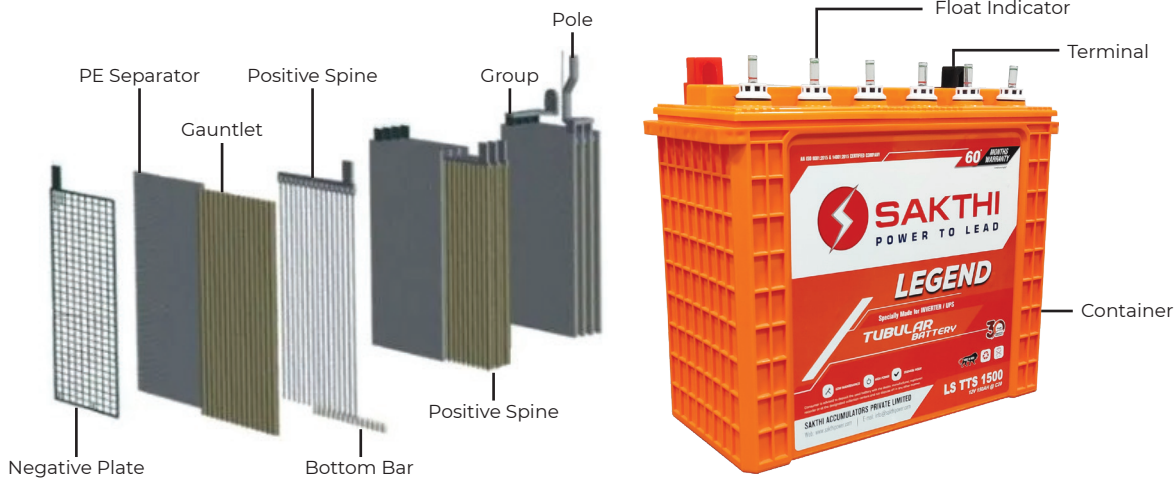

### TECHNICAL SPECIFICATIONS OF SAKTHI "LEGEND" TUBULAR UPS / INVERTER BATTERIES

Type	Nominal Voltage	Capacity Ah @20Hr Rate up to 1.80V/Cell at 27°C	Overall Dimension in mm +/- 5mm			Weight +/- 5%			Charging Current, Amps		
	Volts		Length	Width	Height	Dry (Kg)	Wet (Kg)	Packed (Kg)	Up to 2.4 V/ Cell	Nominal Finish (A)	Trickle (mA)
<b>PP Horizontal Models:</b>											
LS 70S400	12	40	300	170	255	10.3	17.14	17.99	3.5	1.75	35
LS 100S600	12	60	410	173	247	12.55	22.1	23.05	5	2.5	50
LS 120S800	12	80	512	185	252	19	33.81	35.06	6.5	3.25	65
LS 150S1000	12	100	512	210	240	20.2	34.96	36.26	7	3.5	70
<b>PP Vertical Models:</b>											
LS TTS1100	12	100	504	190	430	21.700	49.100	50.700	8.5	4.25	85
LS TTS1200	12	120	504	190	430	25.280	51.200	52.800	10	5	100
LS TTS1500	12	150	504	190	430	29.600	55.100	56.700	13	6.5	130
LS TTS1800	12	180	504	190	430	34.100	58.120	59.720	15	7.5	150
LS TTS2000	12	200	504	190	430	34.780	58.630	60.230	17	8.5	170
LS TTS2300	12	230	504	190	430	40.170	62.650	64.250	20	10	200

#### ALSO AVAILABLE

A comprehensive range of Sakthi Sunlite - C 10 Solar Batteries, Automotive Batteries and 2V Stationary Cells

#### AUTHORISED DEALER

Statutory Notice: All batteries contain lead, which is harmful to humans and the environment. As per statutory requirements, the used battery must be returned to the authorized dealer, manufacturer or at the designated collection centers.